

KEY
S
A
E

UNICO *Easy*
Without outdoor unit

Everything you need

Unico Easy

Unico Easy is the floor air conditioner with no outdoor unit. It is fast and easy to install, practical and simple to use: Unico Easy is the simplest solution for complete air conditioning.

Comfort above all

Unico Easy is the epitome of comfort and convenience: all functions can be activated easily thanks to the new generation remote control. Ergonomic grip and quick, easy operation, the controls can be used directly on the machine (thanks to the practical housing) or remotely, without leaving the comfort of your chair.



Auto and Moon Functions

The perfect climate in all circumstances: the Auto function automatically defines maximum climate comfort according to the temperature and humidity in the room.

The Moon function adapts air conditioning function to the various metabolic phases that occur at night, thus guaranteeing your nightly repose.

Elegant and discreet

Unico Easy is designed to be perfectly integrated in every type of furnishing: its soft curves, and round lines together with compact size make Unico easy a piece of furniture elegant but discreet.

Ssshhh!


Seen but not heard: thanks to the use of a cross-flow fan, the latest generation sliding-vane compressor and high efficiency soundproofing, Unico Easy delivers truly quiet operation (just 38 db).

Ecological

Unico Easy safeguards the environment from all points of view: the optimized "double-duct" technology ensures high performance and utmost efficiency. In fact, Unico Easy has a Class A rating and uses only environmentally-friendly R410A gas.

Comfy warmth

Thanks to the heating Pump Unico Easy HP is not just cooling and dehumidifying. In the intermediate seasons it will be a truly complete climate control system. At low outside temperatures, Unico Easy HP guarantees very high efficiency in heating as you can see from the chart below.

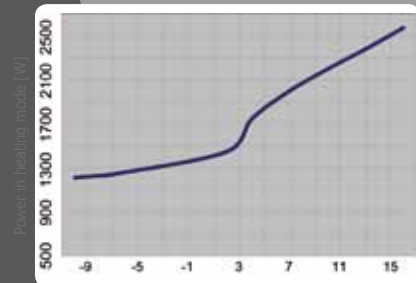

Outdoor temperature °C, RH=87%

		Unico Easy SF	Unico Easy HP
		Cod. 01056	Cod. 00981
Maximum cooling capacity	BTU/h	12.000	12.000
Maximum heating capacity	BTU/h	—	12.000
Input power in cooling mode	W	1000	1000
Input power in heating mode	W	—	900
Dehumidification capacity	l/h	1,0	0,9
Voltage/Frequency	V-F-Hz	230-1-50	230-1-50
E.E.R	—	2,65	2,62
C.O.P.	—	—	2,81
Energy efficiency class in cooling mode	—	A	A
Energy efficiency class in heating mode	—	—	B
Fan speed (internal/external)	—	3/2	3/3
Indoor air flow in cooling mode (max/med/min)	m ³ /h	328-300-274	310-280-250
Indoor air flow in heating mode	m ³ /h	—	310-280-250
Outside air flow in cooling mode (max /min)	m ³ /h	429-258	430-350-260
Dimensions (W x H x D)	mm	693x666x276	693x666x276
Weight (without packing)	kg	39	39
Sound level	db (A) (min-max)	36-43	36-43
Diameter of holes in wall	mm	160	160
Refrigerant gas/load	Type/kg	R410A/0,550	R410A/0,51

OPERATIONAL LIMITS

	Indoor temperature	Outdoor temperature
Operating temperature - max in cooling mode	DB 32°C - WB 23°C	DB 43°C - WB 32°C
Operating temperature - min in cooling mode	DB 18°C	DB 18°C - WB 16°C
Operating temperature - max in heating mode	DB 27°C	DB 24°C - WB 18°C
Operating temperature - min in heating mode	DB 16°C	DB -10°C - WB -11°C

HP = heat pump - HE = high efficiency (energy saving/high performance)